


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.03

UL/CUL 技术 参数		UL/CUL Technical Data				
等 级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	10	-	10	
接线范围	Wire Range		24-12			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	-	320	630	
额定电流	Rated Current	[A]	-	15	15	
额定冲击电压			-	4.0	4.0	
Impulse withstand voltagea	[KV]					
导线截面积	Conductor cross section		2.5			
硬质/柔性导线	Solid/ flexible	[mm²]				
材 料 Material						
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflamability		UL94V-0			
导体材料	Contactur Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀镍 Ni Plated			
一般参数 Other Data						
间距 Pitch		[mm]	5.08			
极数 Poles		[P]	2-24			
剥线长度 Stripping Length		[mm]	9-10			
螺丝 Screw/扭矩 Torque(Max)		[N.m]	M2.5/0.4			
工作温度 Operating temperatur		[°C]	-40~+105			
引针尺寸 Pin Dimensions		[mm]	-			
PCB板孔径 PCB Hole Diameter		[mm]	-			

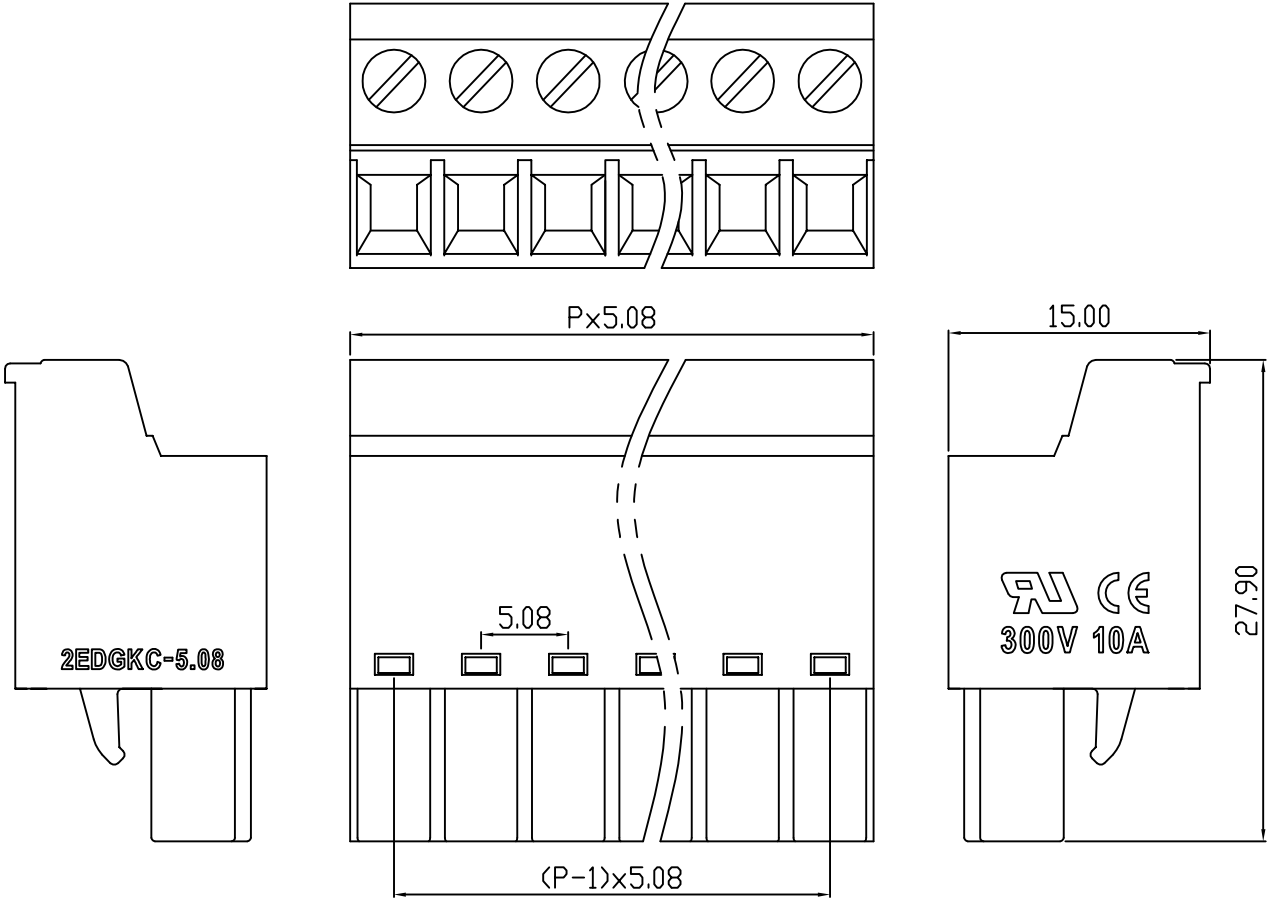

DES.	LQQ	DATE	22.02.19	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本 /	A
CHK.	BY	DATE	22.02.19	SHANGHAI SHANYE ELECTRONICS CO.,LTD								名称 /	
APP.	CLF	DATE	22.02.19							TITLE		2EDGKC-5.08	