
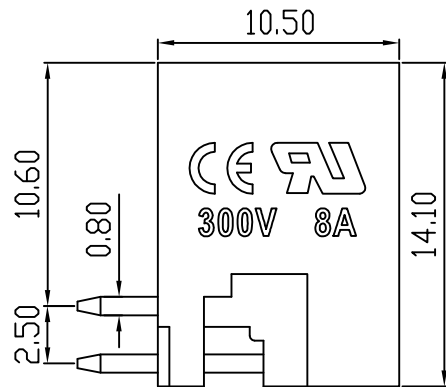
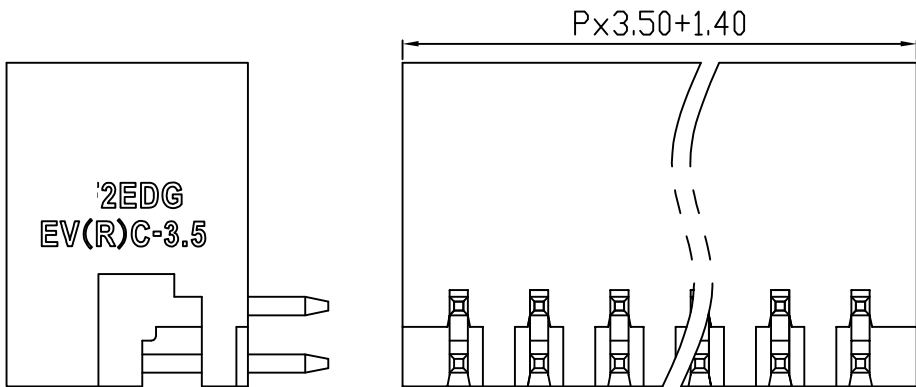
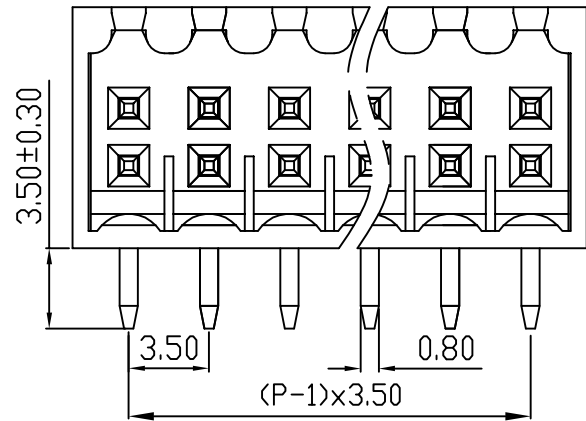
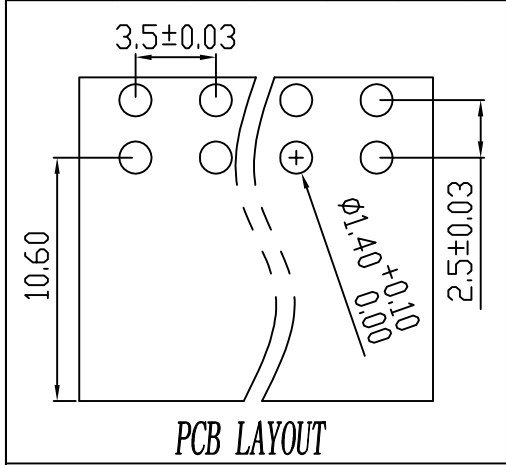


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		GLF	21.03

UL/CUL 技术 参数						
UL/CUL Technical Data						
等 级		Use Group	B	C	D	
额定电压		Rated Voltage	[V]	300	-	300
额定电流		Rated Current	[A]	8	-	10
接线范围		Wire Range	-			
单/多芯线		Solid/Stranded				[AWG]
耐电压		Withstanding Voltage	1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别		Overvoltage Category	III	III	II	
污染等级		Contamination Class	3	2	2	
额定电压		Rated Voltage	[V]	-	160	320
额定电流		Rated Current	[A]	-	7	7
额定冲击电压		Impulse withstand voltagea	[KV]	-	2.5	2.5
导线截面积		Conductor cross section	-			
硬质/柔性导线		Solid/ flexible				[mm²]
材 料						
Material						
绝缘材料		Insulation Material	PA66			
阻燃等级		Imflammability	UL94V-0			
导体材料		Contactur Material	铜合金 Copper alloy			
导体表面镀层		Contactive Coating	镀锡 Tin Plated			
一般参数						
Other Data						
间距		Pitch	[mm]	3.5		
极数		Poles	[P]	2x(2-24)		
剥线长度		Stripping Length	[mm]	-		
螺丝		Screw/ 扭矩	Torque(Max)	[N.m]		-
工作温度		Operating temperatur	[°C]	-40~+105		
引针尺寸		Pin Dimensions	[mm]	3.5		
PCB板孔径		PCB Hole Diameter	[mm]	1.4		

DES.	FZM	DATE	21.03.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本 /	A
CHK.	SY	DATE	21.03.15	SHANGHAI SHANYE ELECTRONICS CO,LTD								名称 /	A
APP.	CLF	DATE	21.03.15										

名称 / TITLE 2EDGERC-3.5