



linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

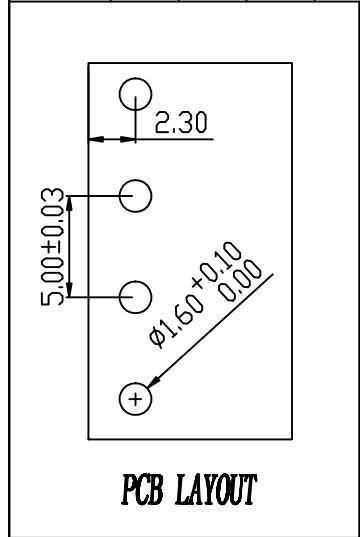

PCB LAYOUT

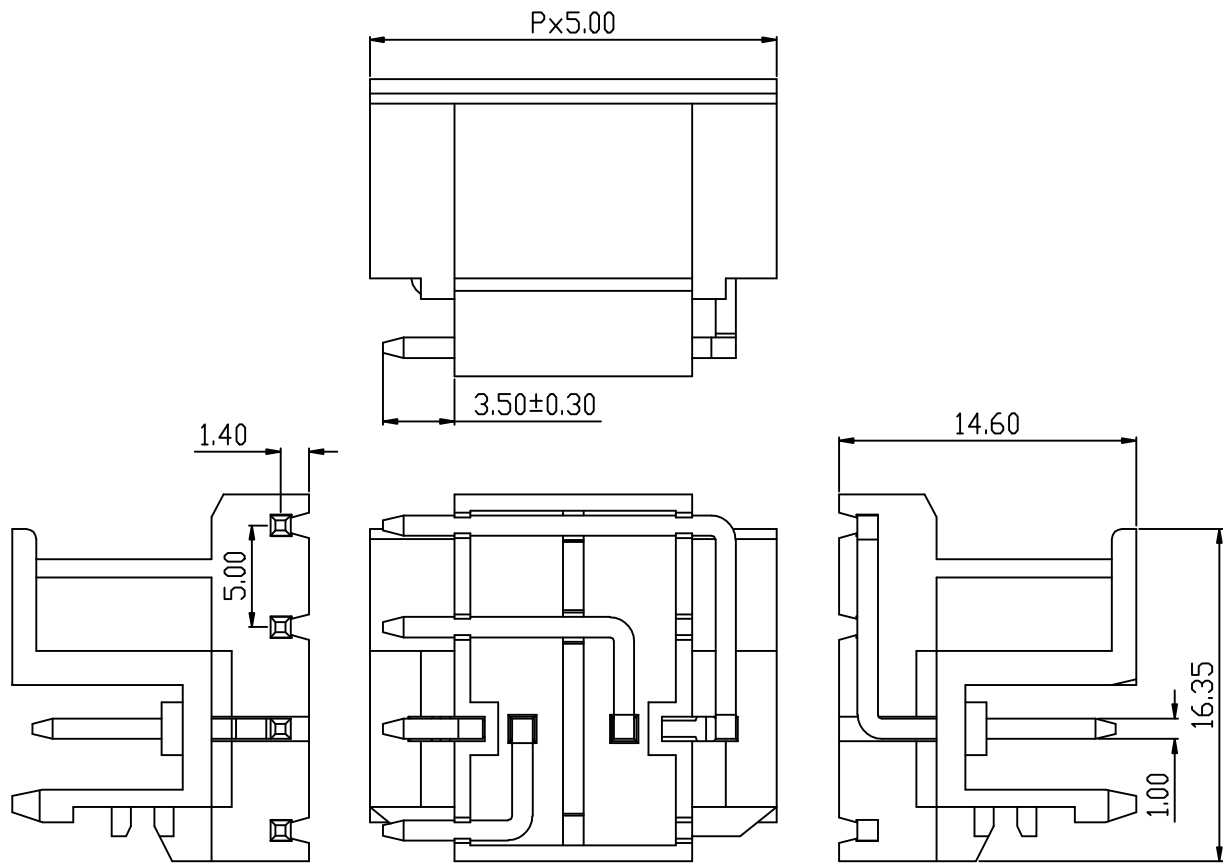

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.04.18

UL/CUL 技术参数 UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	-	300
额定电流	Rated Current	[A]	10	-	10
接线范围 单/多芯线	Wire Range Solid/Stranded	[AWG]	-		
耐电压	Withstanding Voltage		1000V/1Min		
IEC 技术参数 IEC Technical Data					
过电压类别	Overvoltage Category		III	III	II
污染等级	Contamination Class		3	2	2
额定电压	Rated Voltage	[V]	-	320	630
额定电流	Rated Current	[A]	-	15	15
额定冲击电压	Impulse withstand voltages	[kV]	-	4.0	4.0
导线横面积	Conductor cross section		-		
硬质/柔性导线	Solid/flexible	[mm ²]	-		
材 料 Material					
绝缘材料	Insulation Material		PA66		
阻燃等级	Inflammability		UL94V-0		
导体材料	Conductor Material		铜合金 Copper alloy		
导体表面镀层	Conductive Coating		镀锡 Tin Plated		
一般参数 Other Data					
间距	Pitch	[mm]	5.0		
极数	Poles	[P]	2、3、4		
剥线长度	Stripping Length	[mm]	-		
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-		
工作温度	Operating temperatur	[°C]	-40~+105		
引脚尺寸	Pin Dimensions	[mm]	3.5		
PCB板孔径	PCB Hole Diameter	[mm]	1.8		

DES.	LQQ	DATE	22.04.18	单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION		版本/REV	A
CHK.	BY	DATE	22.04.18	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD							名称/TITLE	KF2EDGLF-5.0	
APP.	CLF	DATE	22.04.18										